



FCSL 10.4

244.174 mm

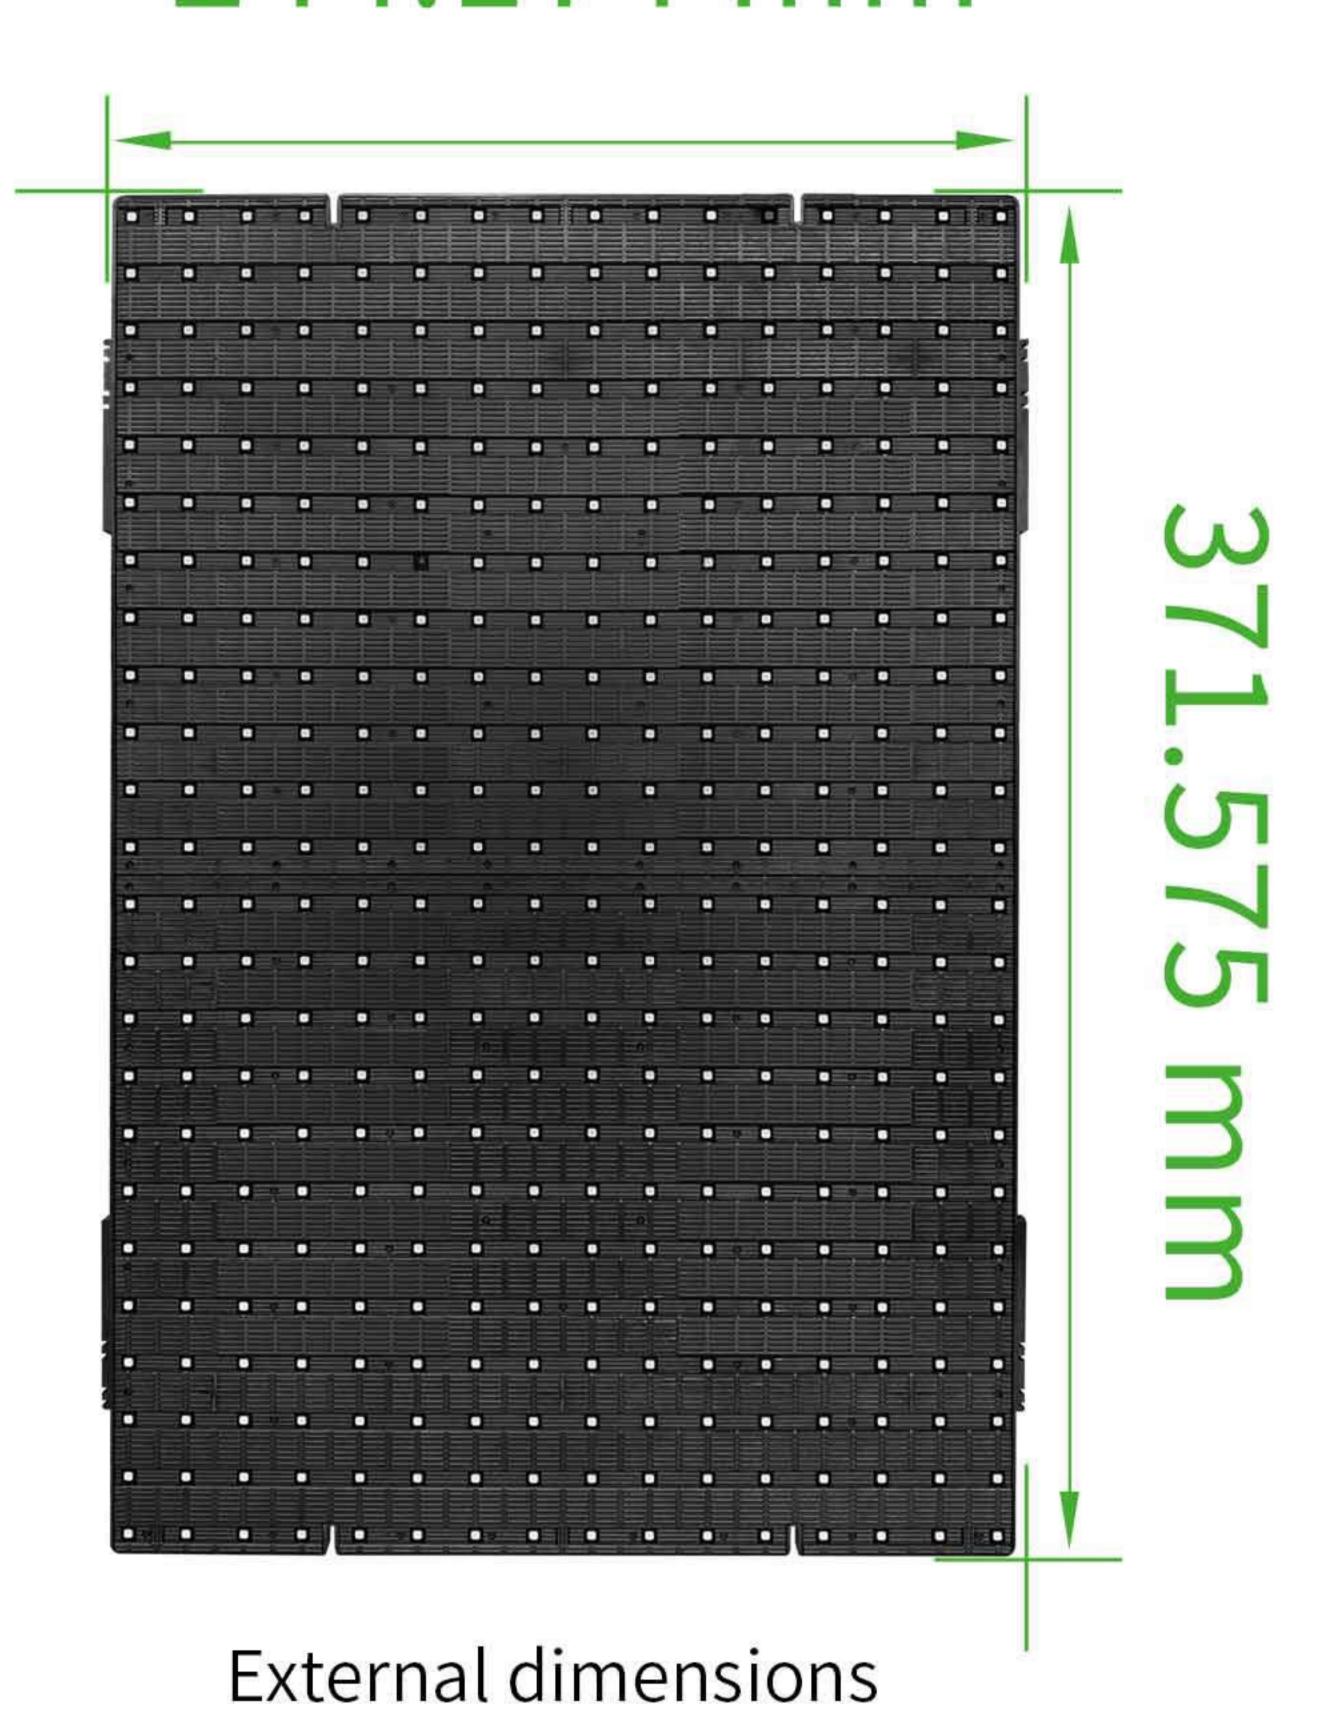

250 mm

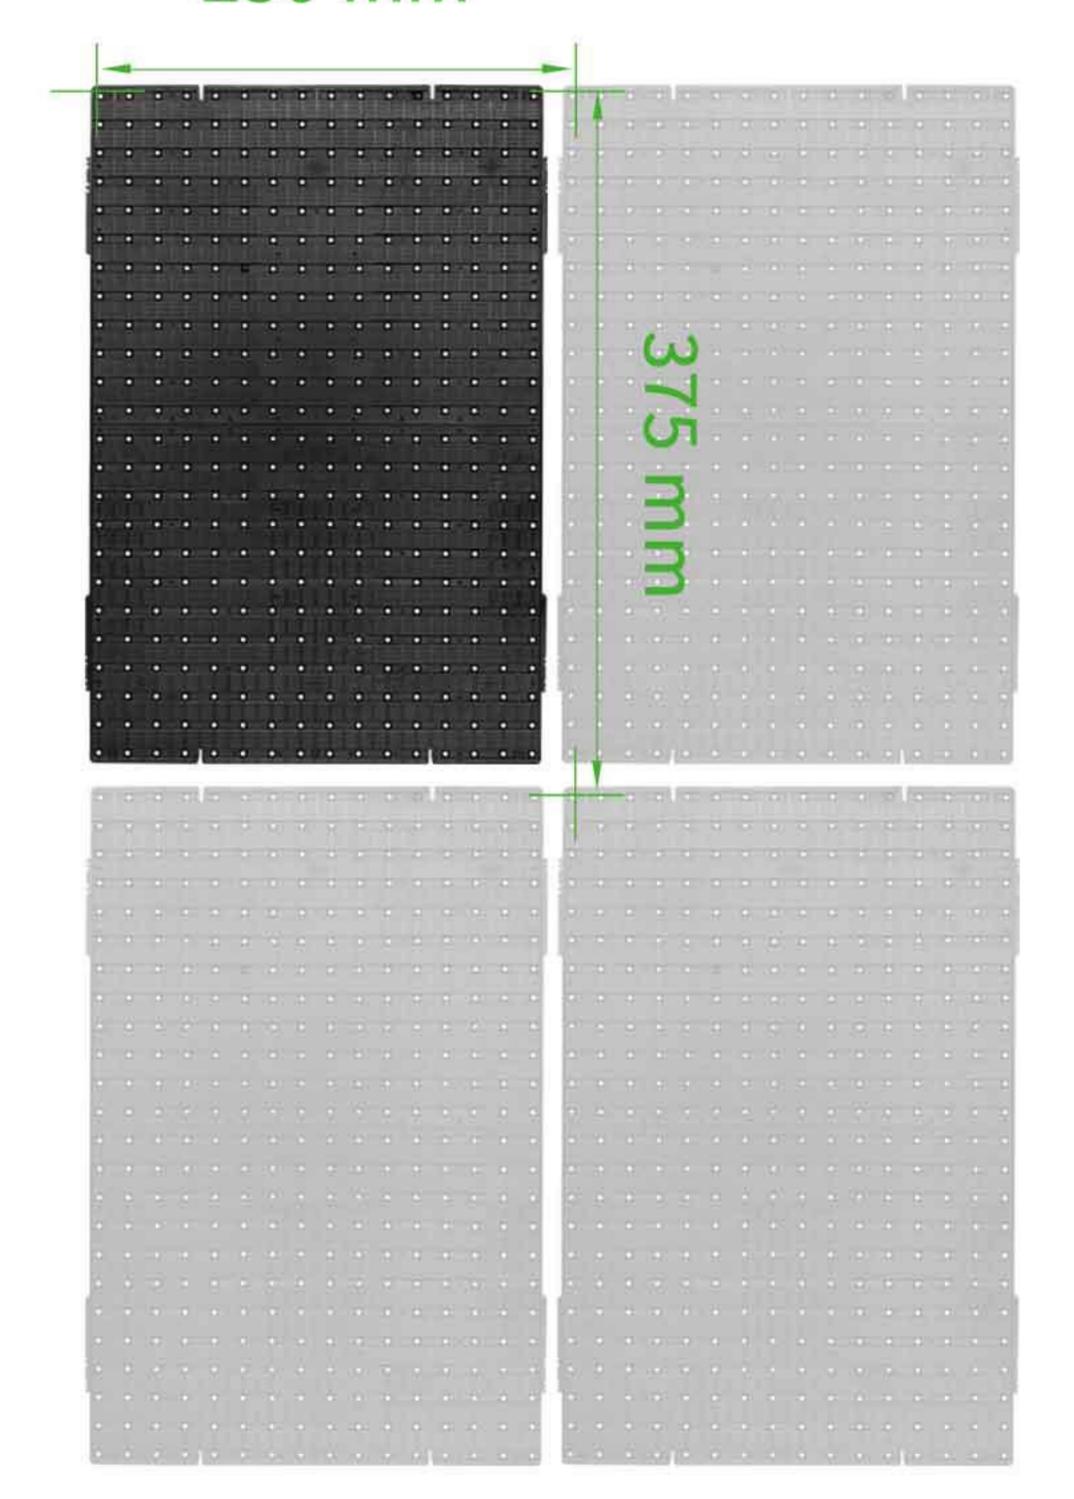

Center point size



Full outdoor 3	360-de	egree foldable LED display
Application Environment		Outdoor
Model		FCSL (Rental/Fix installation/Led floor)
Pixel Pitch	(mm)	10.4
P Rating		IP65(Double-sided glue filling, actual IP68)
LED Type		SMD 2727
Pixel Density (p	oixel/m²)	9216
Driving Mode		1/3
Gray Scale	(bit)	16
Max Brightness(cooper wire led)	(nits)	5000
Max Brightness(golden wire led)	(nits)	5500
Max Power Consumption (cooper wire led)	(w/m^2)	650
Max Refresh Rate	(Hz)	8000
Module Resolution	(pixels)	24*36
Module Size	(mm)	250*375
Module thickness	(mm)	18
Weight	(kg/m²)	14
-olding Angle		360°
Viewing Angle	(H/V)	120° / 120°
Output Voltage	(V)	DC24V/48V
nput Voltage	(V)	AC100 ~ AC240
Maximum load height of single control box	(m)	20m (Multiple steel wire load-bearing)
Best Viewing Distance	(m)	≥10
Brightness adjustment (digital)	(levels)	256
Brightness adjustment (analog current)	(levels)	64-256
Contrast		2500:1
Connection Type (Standard configu (Quick mainte	ration) nance)	2+14pin Soldering CS120 Connector
Short Circuit Protection		Yes
Quick Maintenance		Mechanical and electrical connections available
Controlling Mode		Synchronous/Asynchronous
nstallation Method		Haning / mounting / fixing / Led floor
Operation temperature	(C°)	-40 ~ 65
Operation humidity	(RH)	0% ~ 90%
Certificate		E FE CE

