



## Smart T Plus 15.6

249.79 mm



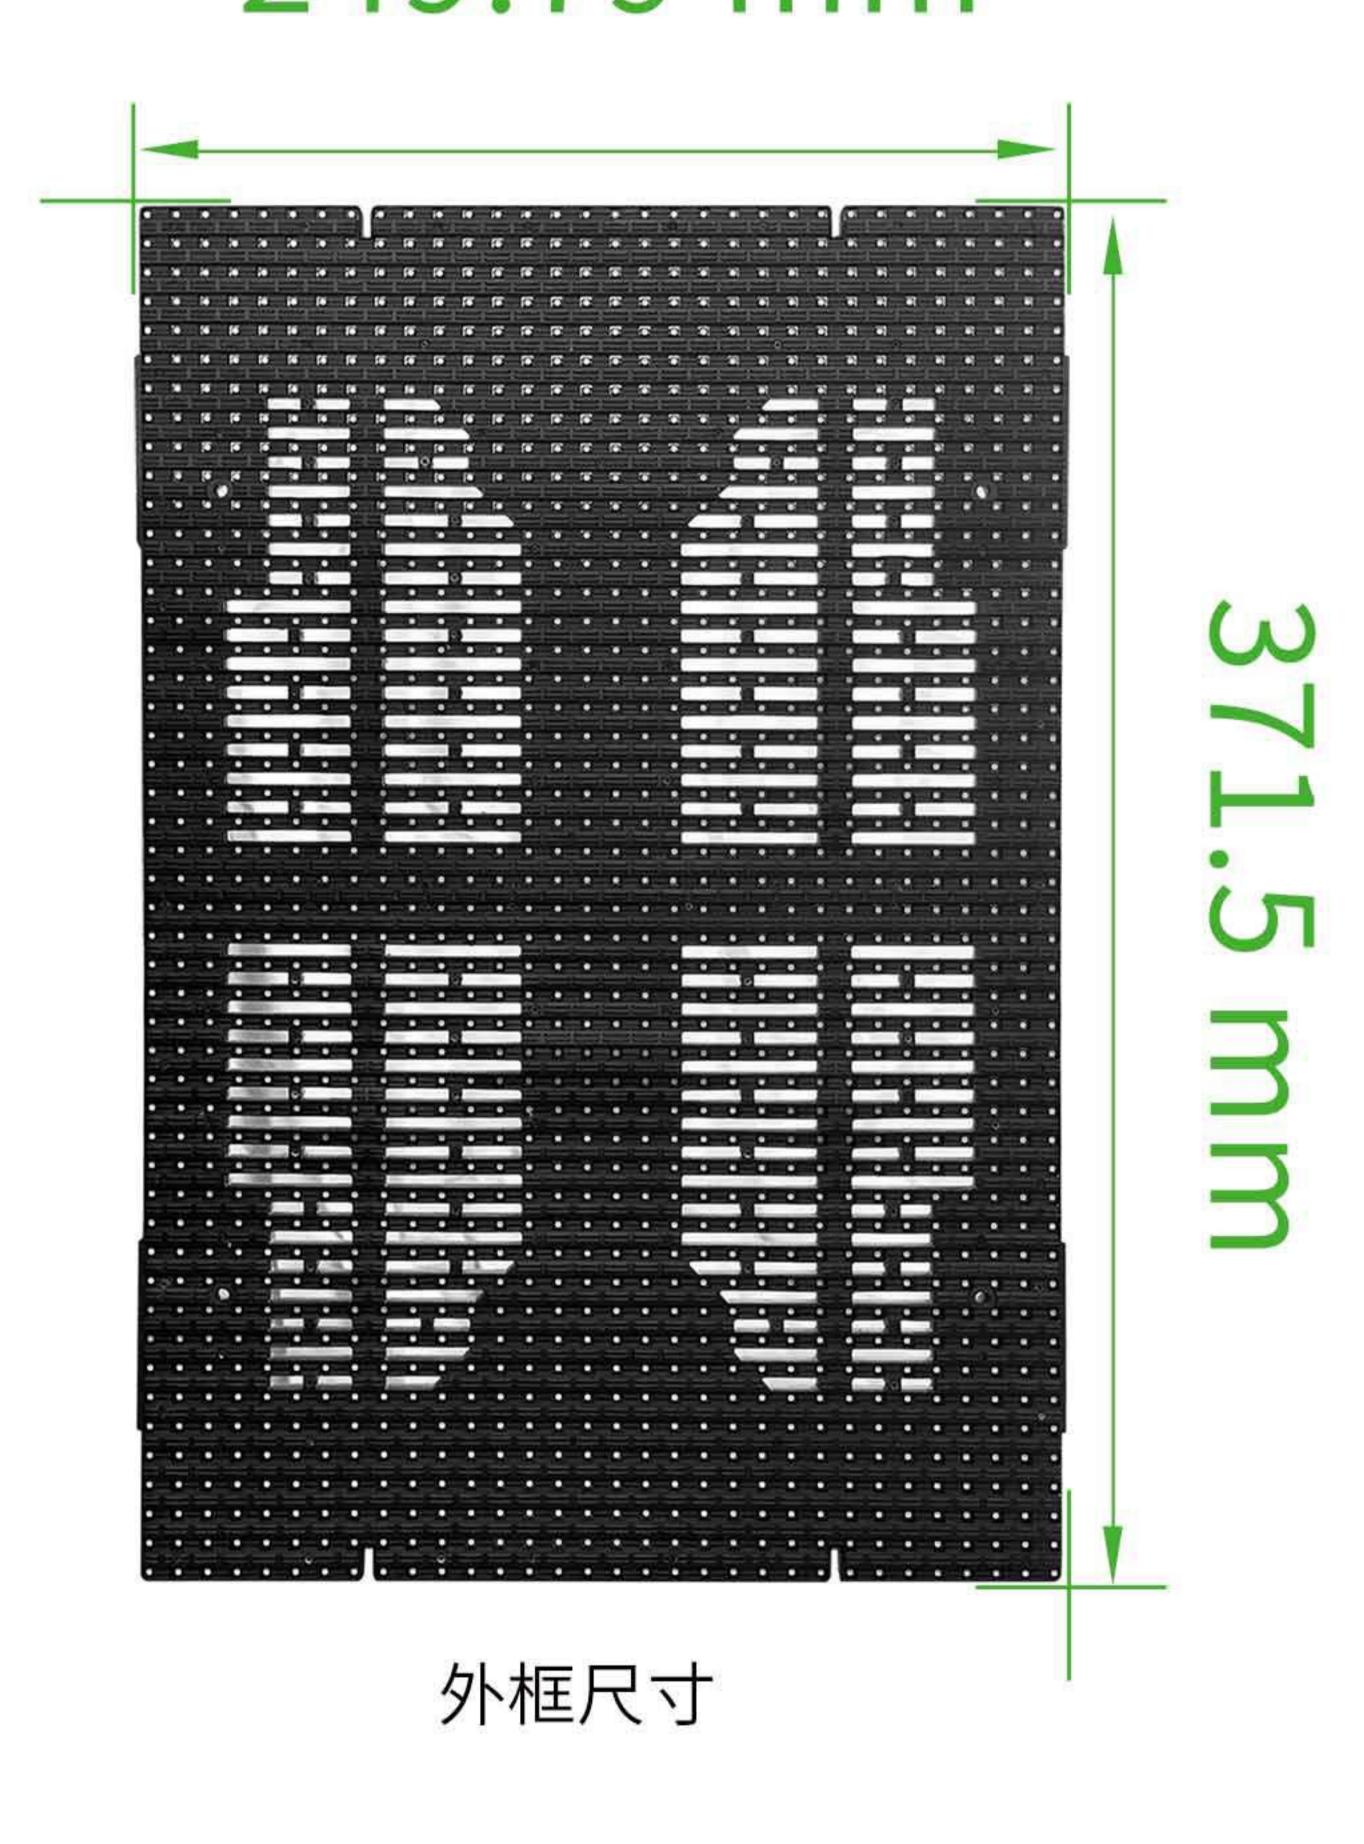

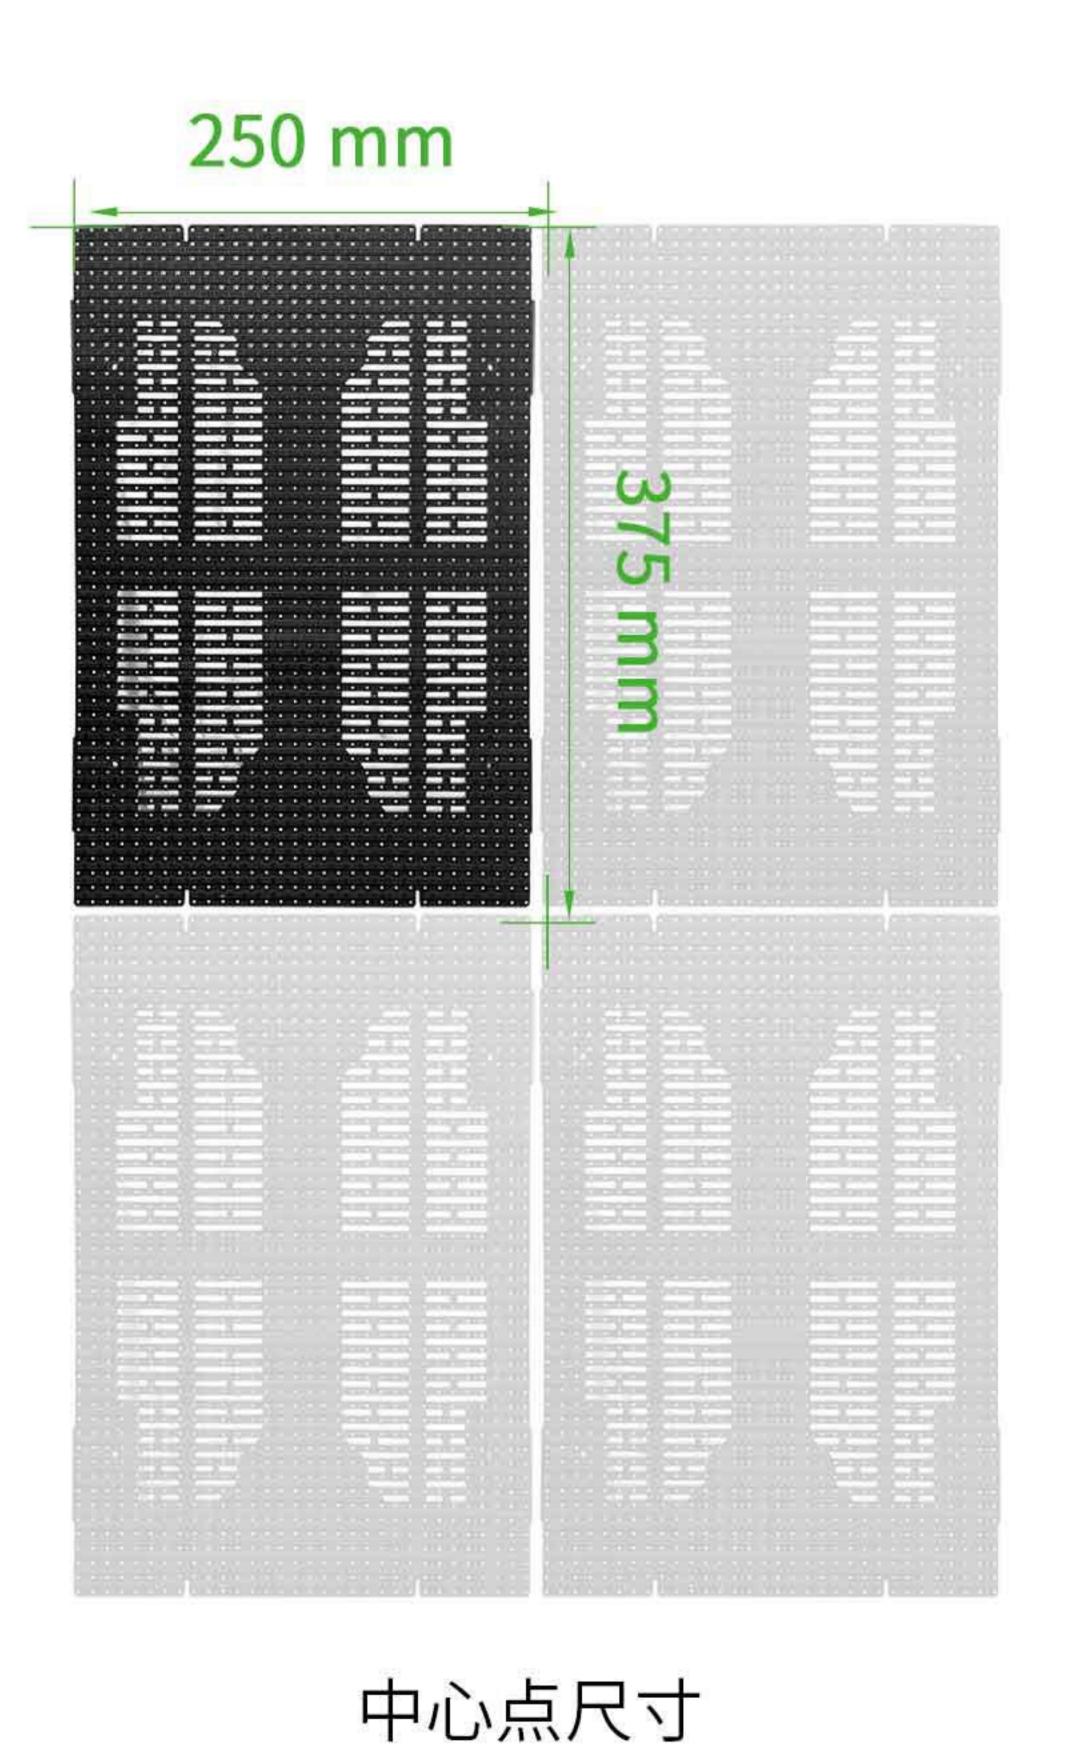

360° Tr	anspare	nt Foldable LED Screen
Application Environment		Outdoor
Model		Smart T Plus(Rental/Fix installation/Led floor)
Pixel Pitch	(mm)	15.6
IP Rating		IP65(Double-sided glue filling, actual IP68)
Transparent rate		14.25%
LED Type		SMD 2727
Pixel Density	(pixel/m²)	4096
Driving Mode		1/2
Gray Scale	(bit)	16
Max Brightness(cooper wire led)	(nits)	
Max Brightness(golden wire led)	(nits)	3500
Max Power Consumption (cooper wire le	d) (w/m²)	
Max Refresh Rate	(Hz)	8000
Module Resolution	(pixels)	16 * 24
Module Size	(mm)	250*375
Module thickness	(mm)	18.5
Weight	(kg/m²)	13
Folding Angle		360°
Viewing Angle	(H/V)	120° / 120°
Output Voltage	(V)	DC24V/48V
Input Voltage	(V)	AC100 ~ AC240
Maximum load height of single control b	ox (m)	20m (Multiple steel wire load-bearing)
Best Viewing Distance	(m)	≥15
Brightness adjustment (digital)	(levels)	256
Brightness adjustment (analog current)	(levels)	64-256
Contrast		2500:1
Connection Type (Standard conf (Quick mair	iguration) ntenance)	2+14pin Soldering 50pin Connector
Short Circuit Protection		Yes
Quick Maintenance		Mechanical and electrical connections available
Controlling Mode		Synchronous/Asynchronous
Installation Method	( <b>^</b> ° <b>)</b>	Haning / mounting / fixing / Led floor
Operation temperature	(C°) (RH)	-40 ~ 65 006 - 0006
Operation humidity	(RD)	0% ~ 90%
Certificate		FC (E C

